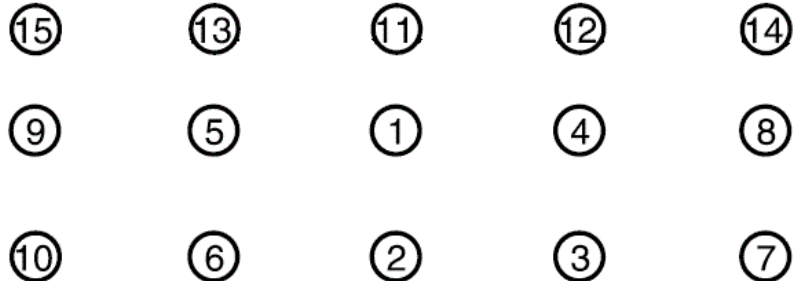


Anziehvorschrift Zylinderkopf**Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****314.430**passend für / suitable for
adaptable à / adaptable a**Chrysler/ Dodge / Jeep****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornilloAnziehen/
Tightening/
Serrage/
Apriete

- ⊙ M12 1-10 25 ft-lb
- ⊙ M8 11-15 15 ft-lb
- ⊙ M12 1-10 40 ft-lb
- ⊙ M8 11-15 15 ft-lb
- M12 1-10 90°
- M8 11-15 25 lb-ft

- ⊙ M12 1-10 35 Nm
- ⊙ M8 11-15 15 ft-lb
- ⊙ M12 1-10 55 Nm
- ⊙ M8 11-15 35 Nm
- M12 1-10 90°
- M8 11-15 35 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Chrysler 300 2009-2018 5.7L V8 345cid HEMI

Dodge Challenger 2009-2018 5.7L V8 345cid HEMI

Dodge RAM1500,2500,3500 2009-2010 5.7L V8 345cid

Jeep Commander 2009-2010 5.7L V8 345cid HEMI

Jeep Grand Cherokee 2009-2018 5.7L V8 345cid HEMI

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/11/12

314.430